

PDU Strip Quick Start Guide

PDU Overview

The Power Innovations rack mountable PDU Strip is a 3-phase, 120/208 VAC power solution for various applications. The PDU Strip features three power banks (for phases A,B, and C) fitted with eight Nema 5-20R receptacles, 30-amp breakers, and 17-foot 30-amp L21-30P plug.

Using the PDU

To Energize the PDU Banks:

1. Plug the load into the PDU Strip.*
2. **CLOSE** the breaker associated with each bank (if the bank has no loads plugged in, then leave that breaker **OPEN**).
3. Turn **OFF (OPEN)** each breaker when not in use.


*Note: When using the PDU it is recommended that loads be distributed between each bank. For example, plug the first load into Bank 1, the second into Bank 2, and the third into Bank 3, then start over at Bank 1.



ELECTRICAL and SAFETY WARNING

Follow NEC, Local Electrical, and Safety Guidelines when operating the PDU Strip.

The PDU Strip is designed to easily mount to a server rack or other rack configuration.

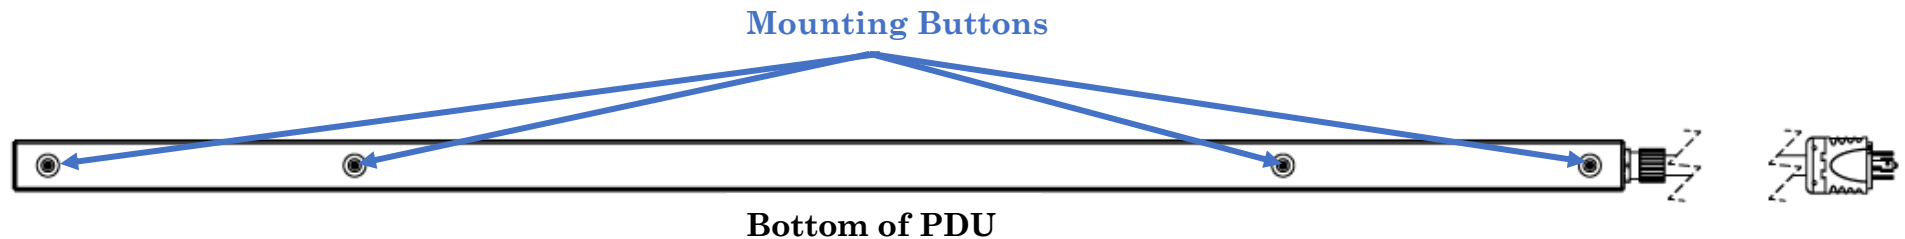

PDU Features

