

LITEON GROUP

EVFC120

120 kW All-in-One DC EV Fast Charger

Description

The EVFC120 is an all-in-one DC quick charger that enables a scalable, continuous charging output in a single footprint. This product offers highly flexible and field configurable Vac input power, which allows accepting the most common distribution voltages, thus reducing overall infrastructure and construction costs.

All of Power Innovations International's EV chargers have standard industry connectivity for fast charging, remote services, and software updates.

Features and Benefits

- Highly flexible power input with no de-rating
- Field replaceable power modules
- Greater than 1 million hours MTBF on PSU topology
- IP54/NEMA 3R enclosure
- Multiple payment/authorization methods
 - RFID and credit card
- Remote upgrades via over-the-air updates

Applications

- Highway infrastructure
- Retail and hospitality
- OEM test facilities
- EV infrastructure and service providers
- Public and commercial buildings
- Municipalities
- Small, mid, and large fleets & depots

Field Configuration Patent Pending



Cabinet model without
cable management




Cabinet model with
cable management

Specifications




Input Voltage	208 or 240 Vac 3-Phase (3P + PE) Delta 480 Vac 3-Phase (3P + N + PE) Wye
Input Operating Range and Current	208 V/240 V 3-Phase Delta: 190 V to 252 V, 400 A max, 50-60 Hz 480 V 3-Phase Wye: 432 V to 504 V, 175 A max, 50-60 Hz
Output Power	120 kW
Output Voltage	250 to 920 Vdc
Efficiency	95%
Charging Connector	CCS1 and NACS
Charging Cable Length	5.5 m (with no cable management), 8 m (with cable management)
Charging/Data Protocols	DIN 70121 and OCPP 1.6J compliant
Network Interface	Cellular 4G LTE, Wi-Fi
RFID	ISO/IEC 14443 A/B, ISO 15393, NFC Reader Mode
Display	7" color LCD
Temperature	-30 °C to +50 °C (Operational); -40 °C to +80 °C (Storage)
Relative Humidity	Up to 95% non-condensing
Altitude	2000 m (6560 ft)
Enclosure Rating	NEMA 3R; IP54
Impact Resistance	IK10
Weight	760 kg

Product Dimensions [mm], in

Without cable management:

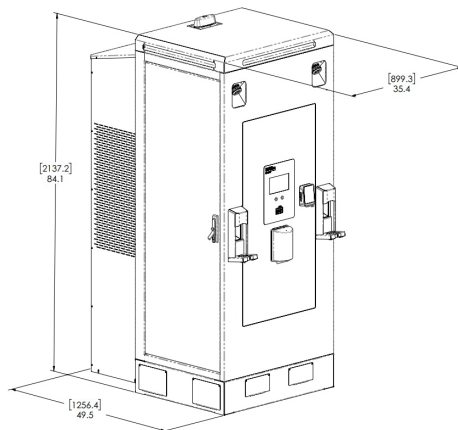

With cable management:

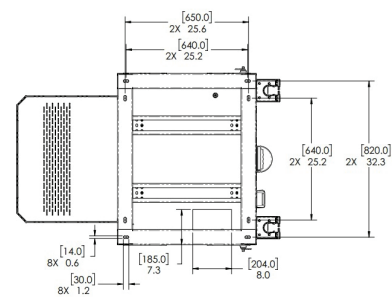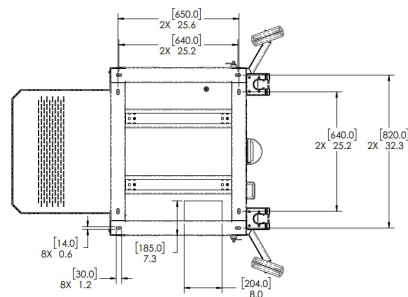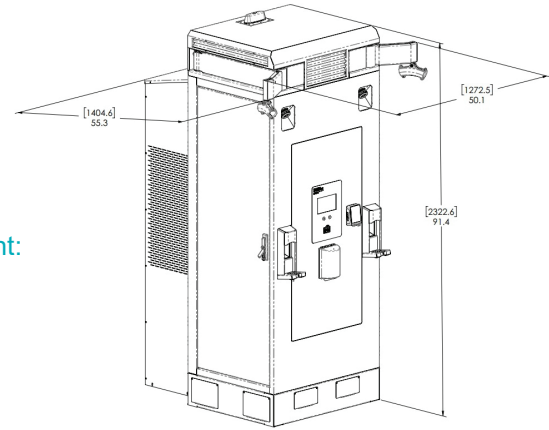

Document No.: DATA136
Last Updated: May 29, 2025

Power Innovations International
1305 South 630 East
American Fork, UT 84003
United States
www.PowerInnovations.com

Pii POWER
INNOVATIONS
INTERNATIONAL

LITEON GROUP