

LITEON GROUP

Description

Power Innovations International's Basic Power Distribution Units (PDUs) are cost-effective, compact and reliable methods of delivering power from a single input to multiple different outputs. These PDUs are zero U, vertical mount, to avoid consuming valuable rack space. A C19 inlet as the power input allows for multiple different cord lengths to be plugged into the PDU to meet application requirements.

Features and Benefits

- Simple and reliable Power Distribution Unit (PDU)
- Supports 0U (vertical rack mount) installation
- Available in two different versions
- Integrated overcurrent protection
- C19 Inlet as power input




Specifications

Electrical	RU-2035-139N	RU-2035-390N
Input Power	4800 W	4800 W
Input Voltage	208-240 Vac Single Phase	
Input Current	16 A (IEC); 20 A (UL)	
Input Connector	IEC 60320 C19 Inlet	
Frequency	50 & 60 Hz	
Output Voltage	Based on Input Voltage	
Output Current	IEC 60320 C13: 10 A (IEC); 15 A (UL) IEC 60320 C19: 16 A (IEC); 20 A (UL) IEC 60320 C39: 16 A (IEC); 20 A (UL)	
Output Receptacles	IEC 60320 C13 (Qty: 8) IEC 60320 C19 (Qty: 4)	IEC 60320 C39 (Qty: 10)
Output Protection	20 A Hy-Mg Circuit Breaker per Branch	
Mechanical		
Dimensions (W x H x D)	1.75" x 21.375" x 3.70" (44.5 mm x 453 mm x 94 mm)	1.75" x 21.375" x 3.70" (44.5 mm x 453 mm x 94 mm)
Weight	4.5 lbs. (2.05 kg)	4.5 lbs. (2.05 kg)
Cord Length	Customer Supplied	
Environmental		
Temperature	Operating: 0 °C to +50 °C, Storage: -25 °C to +65 °C	
Humidity	0% – 95% relative (non-condensing)	
Altitude	Operating: 0 m to 2000 m, Storage: 0 m to 15000 m	
General		
Safety Standards	Conforms to IEC 62368-1; CE marking	
Mounting Hardware	Mounting Donuts (4) Mounting Donut Screws (4) External P.E. Screws (1)	Mounting Donuts (4) Mounting Donut Screws (4) External P.E. Screws (1)


LITEON GROUP

Front Panel and Dimensions (mm)

RU-2035-139N

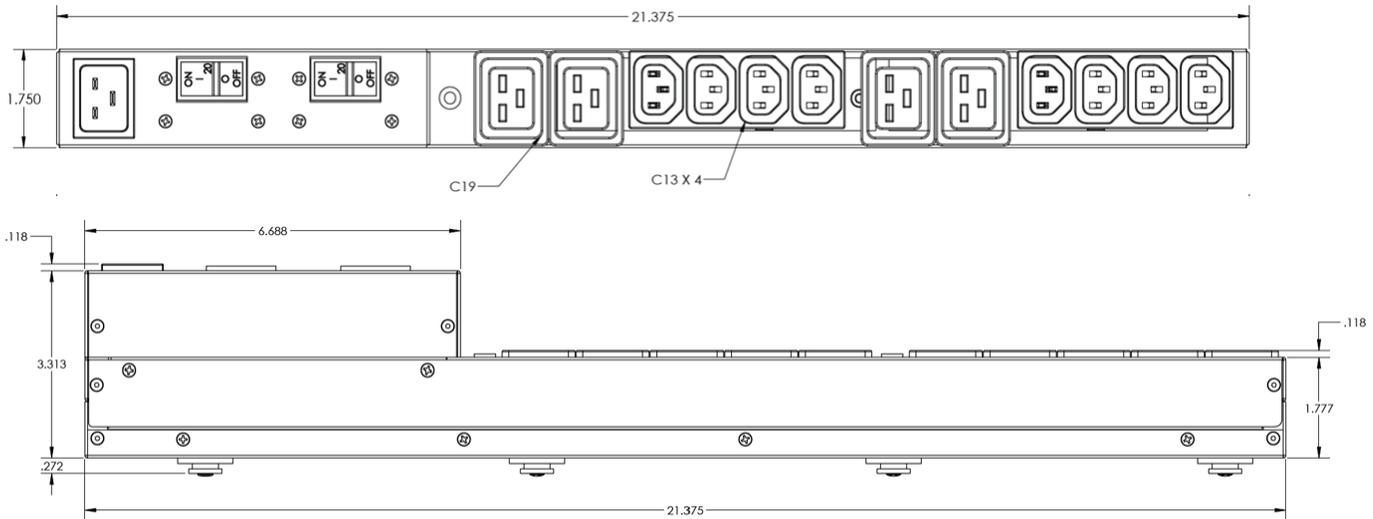

RU-2035-390N

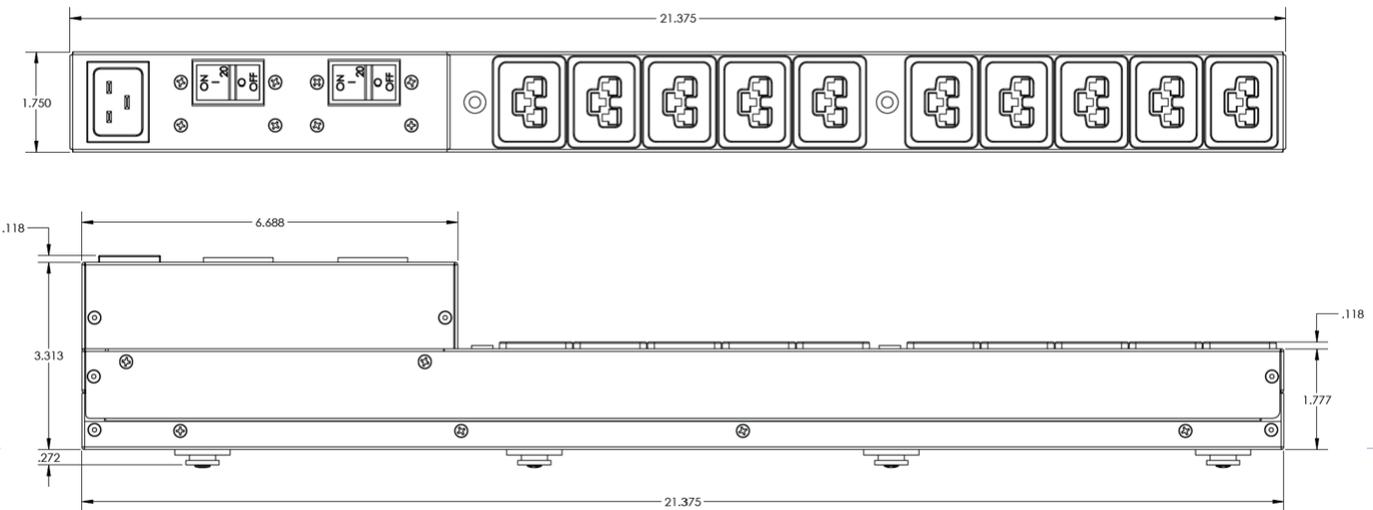

Life Support Policy: Power Innovations International (Pii) does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Pii reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Pii also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Document No.: DATA153
Last Updated: January 26, 2026

Power Innovations International
1305 South 630 East
American Fork, UT 84003
United States
www.PowerInnovations.com